

Press Release

INTRODUCING NEW INSTRUMENTS FOR 2018

Portable Hand-Held Dewpoint Hygrometers; SADPmini2 & SADPmini2-Ex

Envirotec, 2018 – We're pleased to inform the new latest design of the SADPmini2 range of Dewpoint Hygrometers, incorporating many new functions and features compared with the previous range.

Features


- ❑ Fast Repeatable Measurements
- ❑ LCD Colour Screen – Real Time Graphics
- ❑ PC/Laptop User Software Included
- ❑ Range:
 - -110°C to -20°C (-166°F to -4°F) dewpoint, Silver
 - -100°C to 0°C (-148°F to +32°F) dewpoint, Purple
 - -80°C to +20°C (-112°F to +68°F) dewpoint, Blue
- ❑ Accuracy:
 - Better than $\pm 2^\circ\text{C}$ dewpoint ($\pm 3.6^\circ\text{F}$)
- ❑ Repeatability:
 - Better than $\pm 0.3^\circ\text{C}$ dewpoint ($\pm 0.54^\circ\text{F}$)




- ✓ USB
- ✓ Bluetooth
- ✓ Logging
- ✓ SD Card
- ✓ Li-Ion Battery
- ✓ Calculator App
- ✓ 2 Year Warranty



The unique design allows purging of the gas in the "Dry-Down Position" which will bring all surfaces and voids to equilibrium. The "Head" can then be raised to take a reading.

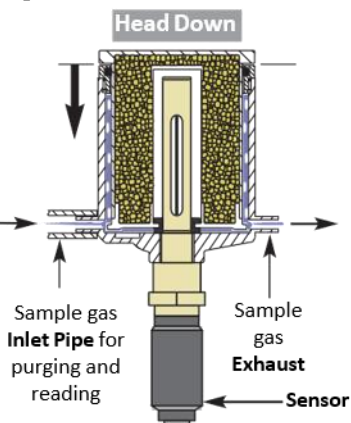

Dry-down position

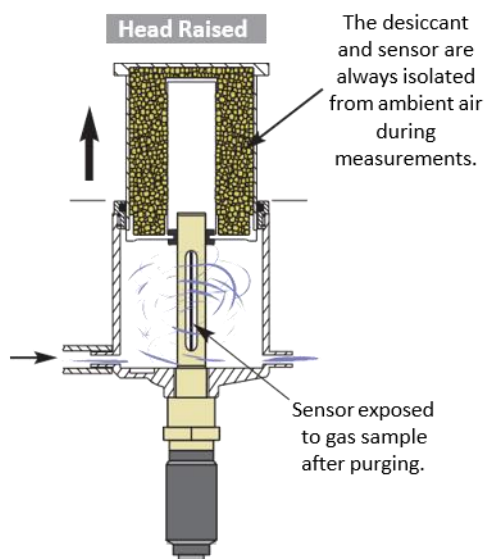

After display has settled, take a reading

Model SADPmini2-B (Basic)

- ✓ Supplied ready for use with a 2 Year Warranty & Calibration Traceable to International Standards.

Model SADPmini2-L (Data Logging with Bluetooth Connectivity)

- ✓ With Advanced Data Logging Function & Bluetooth Connectivity for Data Transfer & Mobile Applications.
- ✓ Supplied ready for use with a 2 Year Warranty & Calibration Traceable to International Standards.

Model SADPmini2-Ex (For Use in Hazardous Areas, with full Data Logging & Bluetooth Connectivity)

- ✓ As -L version above, but ATEX Certified & UL Listed for hazardous Applications.
- ✓ Supplied ready for use in a Carrying Case with a 2 Year Warranty & Calibration Traceable to International Standards.

NEW - Accessories**PSS - Portable Sample System**

- Sampling System for pre-conditioning of Pressurised Gas Samples.
- Compact design with easy docking arrangement and compatible with all SADPmini2 & SADPmini range of Portable Dewpoint Hygrometers.
- Various options include, quick connect fittings, PTFE lined braided SS sampling pipe, pressure regulator, needle valve & flow meter.



Bluetooth Printer - use with SADPmini2-L & SADPmini2-Ex Dewpoint Hygrometer for Wireless printing of Data from SADPmini2

Should you have questions or wish to discuss in greater detail, please don't hesitate to contact our sales office below or email us at sales@enviroterm.com.

Head Office	Penang Office	Johor Bahru Office
Lot 5035, Jalan 18/62, Taman Sri Serdang, 43300 Seri Kembangan, Selangor, Malaysia. Tel: 03-8943 4558 Fax: 03-8943 6012 Contact: W.S. Tee Sales Manager 012 3343913	5112, Jalan Capri, Taman Capri, 12000 Butterworth, Penang, Malaysia. Tel: 04-331 1371 Fax: 04-331 1373 Contact: Sandra Lim Business Support Manager 012 4922953	No 37-01, Jalan Setia Tropika 1/25, Taman Setia Tropika, 81200 Kempas, Johor Bahru, Malaysia. Tel: 07-236 2768 Fax: 07-236 2769 Contact: Ethan Chan Branch Manager 012 6751276